


BURNERS & BURNER COMPONENTS

Wayne Complete Burner Assemblies



EH

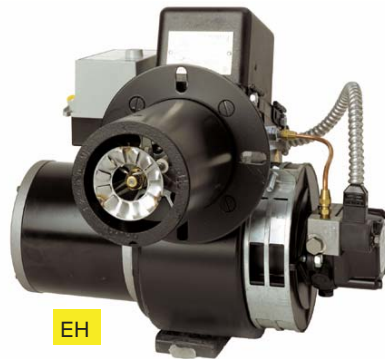

MSR

	Wayne #	Description	Voltage	Type	Each
V00-173119	173-119	1/4 HP - 4" Tube Length	240V/60HZ	EH	716.60
V00-17379-2	173-111	1/4 HP - 4" Tube Length, Capacitor Start	120V/60HZ	EHA	759.90
V00-17383	173-083	1/5 HP - 3 3/4" Tube Length, Capacitor Start	120V/60HZ	EHASR	681.10
V00-17339	173-099	1/5 HP - 3 3/4" Tube Length	120V/60HZ	EHASR	640.40
V00-17391	173-115	1/5 HP - 3 3/4" Tube Length	120V/60HZ	EHASR	639.30
V00-173127	173-127	1/5 HP - 3 3/4" Tube Length	120V/60HZ	EHASR	616.10
V00-173133	173-133BLA	1/7 HP - 3 3/4" Tube Length	120V/60HZ	MSR	535.90
V00-173139	173-139BLA	1/7 HP - 3 3/4" Tube Length	120V/60HZ	MSR	558.70

Wayne Replacement Parts



◆ Burner parts for Wayne burners



		Item	Each
V00-02668	Outer Air Band - 2668-002	1	10.20
V00-02669	Inner Air Band - 2669-002		9.50
V00-12484	Flange Gasket - #12484	4	3.50
V00-12574	Electrode Insulator - 100005-002	5	4.30
V00-12945	G-shaped Buss Bar - #12945	6	8.40
V00-13003	Air Cone Ring - #13003	10	44.00
V00-13038	Transformer Clip - 100689-001	7	2.80
V00-13278	Shaft Coupling - 13278	8	3.50
V00-13279	Shaft Coupling - 13279	8	6.70
V00-14159	Air Cone (#3ASR) - 14159		24.70
V00-14160	Air Cone (#4A) - 14160		24.70
V00-20372	Burner Housing, Black - 20372	2	103.00
V-100004-003	Straight Buss Bar - #100004-003	3	3.90
V-30537-003	Burner Gun Ass'y - 30537-003	9	112.00
V00-30535-43	Burner Gun Ass'y - 30535-043	9	173.10
V00-30540-07	Burner Gun Ass'y - 30540-003	9	119.40
V00-30540-16	Burner Gun Ass'y - 30540-016	9	127.30

Wayne Electrode Assemblies



◆ Each assembly includes:
stem, insulator, buss bar, & pal nut



		Each
V-100772-001	Ass'y, Right - w/straight buss bar - #100772-001	9.70
V-100773-001	Ass'y, Left - w/straight buss bar - #100773-001	9.70
V00-147332RH	Ass'y, Right - w/G-shaped buss bar - #14733-001	13.30
V00-147342LH	Ass'y, Left - w/G-shaped buss bar - #14734-001	13.30

BURNER COMPONENTS

Wayne 12 Volt Burner Motor Kit



◆ Includes: motor, coupling, plate, & screws

		Each
V-101126-001	12V Burner Motor Kit - "Standard Amp." - #101126-001	140.00
V-101126-002	12V Burner Motor Kit - "Low Amp." - #101126-002	139.70

Wayne Burner Motors



*PSC Motor: Wayne Combustion made some changes to their MSR Burners. One change was to go from Marathon to a PSC motor (permanent split capacitor). As far as a field replacement, you can change from a Marathon to a PSC motor, but it is not a direct replacement. It requires a kit to do so.

*V00-23000-KITM includes: PSC motor, tubing, hole plug, bushing, and wire wrap. Burners affected are: V00-173133 on 216AX4 and 216X4, V00-173139 on 311AX4 and 311X4, V00-173171 on 150 Space Heater, V00-173173 on 216AXX and 216XX, V00-173177 on 311AXX and 311XX, and V00-173197 on Whitco 160 Space Heater.

		Each
V00-20627	3450 RPM, 1/7 HP, 115V/60HZ - #20627	147.30
V00-20892	3450 RPM, 1/8 HP, 230V/60HZ - #20892	147.60
V00-21126	3450 RPM, 1/4 HP, 115V/60HZ - #21126	207.50
V00-20388	3450 RPM, 1/4 HP, 230V/50-60 HZ - #20388	207.80
V00-20554	3450 RPM, 1/5 HP, 115V/60 HZ - #20554	137.00
V00-21328	3450 RPM, 1/5 HP, 230V/60HZ - #21328	137.00
V00-23000-002	3450 RPM, 1/7 HP, 120V/60HZ - #23000-002 PSC "Motor Only"	108.90
V00-23000-KITM	Kit, Motor - Marathon to PSC "See Notes Above"	118.30

Wayne Burner Igniter



◆ 20,000 Volt peak, Approx. 2 lbs., Note: Oct. 2005 - Wayne changed from France brand to Dongan

		Each
V-101121-001	120V/60HZ - Rear Hinge - #101295-SERM (Includes: #101054-001 Igniter & #21723-013 Mounting Plate)	90.00

Wayne Burner Transformers



◆ 10,000 Volt spark, Approx. 8 lbs.
◆ Wayne changed to Allanson brand

		Each
V00-20358	115V/60HZ - Side Hinge - #23101-E (#21659-002 on an E-Plate w/Gasket)	102.10
V00-21153	230V/60HZ - Side Hinge - #23103-E (#100991-002 on an E-Plate w/Gasket)	118.80

Wayne Burner Transformer



◆ 10,000 Volt spark, Approx. 8 lbs.
◆ Wayne changed to Allanson brand

		Each
V-23101-M	115V/60HZ - Rear Hinge - #23101-M (M Burner)	116.80
V-23103-M	240V/60HZ - Rear Hinge - #23103-M (MSR Burner)	128.50

Igniter & Transformer Tester



◆ A fast & dependable way to instantly test igniters & transformers! Touch the high voltage spheres to the high voltage contacts of any brand igniter or transformer for 3 seconds. The green LED lights up if the unit is good. Lightweight, compact, and durable

		Each
Z09-00002	Igniter/Transformer Tester - (Check-Mate)	114.60

Wayne Tune Up/Repair Kit



◆ Fits burners: M, MSR, MH, ER, ERA, EH, EHA, EHASR, OE, & OEA
◆ Kit includes: (2) Electrode stems, (2) Electrode ass'y w/insulator, (2) 8" Buss bars, (2) Insulator bushings, (1) Oil line ass'y, (1) Coupling, (1) Elbow, (1) Buss bar support, and (1) Gun setting gauge

		Each
V00-31156	Repair Kit - #31156	45.00

Burner Solid State Igniters



◆ 20,000 Volt peak, Approx. 2 lbs.
◆ V00-99001 Includes:
(1) V00-05251 12V Igniter #5251, (2) V-100732-001 Compression Spring #100732-001, (1) V00-23200 Housing Cover #23200, (4) H04-13805 Screws
◆ V00-99002 Includes:
(1) V00-05251 12V Igniter #5251, (2) V-100732-001 Compression Spring #100732-001, (1) V-21723-014 Housing Cover #21723-014, (4) H04-13805 Screws
◆ V00-99006 Includes:
(1) V-101308-001 12V Igniter #101308-001 (Custom Coil Brand), (2) V-100732-001 Compression Spring #100732-001, (1) V-101309-002 Mounting Base #101309-002, Screws
*This kit is meant for 12V burners w/a timer - timer is NOT incl.

		Each
V00-05251	12V Igniter w/o Mounting Plate - #5251	143.40
V00-99001	12V Igniter Kit - w/Mounting Plate "Side Hinge"	193.00
V00-99002	12V Igniter Kit - w/Mounting Plate "Rear Hinge"	177.60
V00-99006	12V Igniter Kit - Mounting Base for Burner w/timer "timer not included" - Wayne #31812-TMR	179.80

Fans



◆ For burners, Set screws included
◆ #21427003 - Wayne has made a change - now use #101317-001: The #101317-001 requires 5/8" spacing and no adaptor bushing. The #21427-003 had required a .014" spacing and some specs called for the adaptor bushing and some did not.

		Each
645-00435	6 5/16" x 4" x 1/2" w/ 1/8" Keyseat	123.70
V00-20288	3.44" W x 5 1/4" OD - #20288	14.40
V00-20289	6" Dia. - #21854	35.80
V00-21427	4" Dia. x 3 1/2" W - #21427	13.80
V00-101317001	2.44" W x 4.53" OD - #101317-001 (Used on 12 V DC Burners)	22.90

BURNER COMPONENTS

ProTek Nozzle Check Valve



- ◆ Replaces standard filter on Delavan nozzle
- ◆ Unscrew filter in nozzle and screw in new check valve/filter!
- ◆ 100 PSI
- ◆ Reduces smoke and oil smell in the off cycle by preventing oil after-drip from the nozzle.
- ◆ The reduction of smoke (carbon and soot) helps maintain burner set up efficiency longer and extend the time period between appliance clean ups.
- ◆ Greater heating efficiency, reduction - even elimination of start-up rumble for cleaner air and safer heating.
- ◆ No more (smokey) burns at start up!



V00-60101-2	Check Valve for fuel nozzle - ProTek - (5 Pack)	Each 74.30
-------------	---	----------------------

Delavan Fuel Nozzles

- ◆ V1 - V5 nozzles:
\$6.20 ea.
- ◆ V6 nozzles:
\$7.90 ea.



Description	
V1.00 60DB	1.00 GPH, 60°, Type B
V1.00 80DB	1.00 GPH, 80°, Type B
V1.00 90DA	1.00 GPH, 90°, Type A
V1.00 90DB	1.00 GPH, 90°, Type B
V1.10 80DA	1.10 GPH, 80°, Type A
V1.10 80DB	1.10 GPH, 80°, Type B
V1.10 90DA	1.10 GPH, 90°, Type A
V1.10 90DB	1.10 GPH, 90°, Type B
V1.25 60DB	1.25 GPH, 60°, Type B
V1.25 70DA	1.25 GPH, 70°, Type A
V1.25 80DA	1.25 GPH, 80°, Type A
V1.25 80DB	1.25 GPH, 80°, Type B
V1.25 90DA	1.25 GPH, 90°, Type A
V1.25 90DB	1.25 GPH, 90°, Type B
V1.35 80DA	1.35 GPH, 80°, Type A
V1.35 80DB	1.35 GPH, 80°, Type B
V1.35 90DA	1.35 GPH, 90°, Type A
V1.35 90DB	1.35 GPH, 90°, Type B
V1.50 70DA	1.50 GPH, 70°, Type A
V1.50 80DA	1.50 GPH, 80°, Type A
V1.50 80DB	1.50 GPH, 80°, Type B
V1.50 90DA	1.50 GPH, 90°, Type A
V1.50 90DB	1.50 GPH, 90°, Type B
V1.65 80DA	1.65 GPH, 80°, Type A
V1.65 80DB	1.65 GPH, 80°, Type B
V1.65 90DA	1.65 GPH, 90°, Type A
V1.65 90DB	1.65 GPH, 90°, Type B

Description	
V1.75 80DA	1.75 GPH, 80°, Type A
V1.75 80DB	1.75 GPH, 80°, Type B
V1.75 90DA	1.75 GPH, 90°, Type A
V1.75 90DB	1.75 GPH, 90°, Type B
V2.00 60DB	2.00 GPH, 60°, Type B
V2.00 80DA	2.00 GPH, 80°, Type A
V2.00 80DB	2.00 GPH, 80°, Type B
V2.00 90DA	2.00 GPH, 90°, Type A
V2.00 90DB	2.00 GPH, 90°, Type B
V2.25 80DA	2.25 GPH, 80°, Type A
V2.25 80DB	2.25 GPH, 80°, Type B
V2.25 90DA	2.25 GPH, 90°, Type A
V2.25 90DB	2.25 GPH, 90°, Type B
V2.50 80DA	2.50 GPH, 80°, Type A
V2.50 80DB	2.50 GPH, 80°, Type B
V2.50 90DA	2.50 GPH, 90°, Type A
V2.50 90DB	2.50 GPH, 90°, Type B
V2.75 80DA	2.75 GPH, 80°, Type A
V2.75 80DB	2.75 GPH, 80°, Type B
V2.75 90DA	2.75 GPH, 90°, Type A
V2.75 90DB	2.75 GPH, 90°, Type B
V3.00 80DA	3.00 GPH, 80°, Type A
V3.00 80DB	3.00 GPH, 80°, Type B
V3.00 90DA	3.00 GPH, 90°, Type A
V3.00 90DB	3.00 GPH, 90°, Type B
V3.25 80DA	3.25 GPH, 80°, Type A
V3.25 80DB	3.25 GPH, 80°, Type B

Description	
V3.25 90DA	3.25 GPH, 90°, Type A
V3.25 90DB	3.25 GPH, 90°, Type B
V3.50 80DA	3.50 GPH, 80°, Type A
V3.50 80DB	3.50 GPH, 80°, Type B
V3.50 90DA	3.50 GPH, 90°, Type A
V3.50 90DB	3.50 GPH, 90°, Type B
V4.00 80DA	4.00 GPH, 80°, Type A
V4.00 80DB	4.00 GPH, 80°, Type B
V4.00 90DA	4.00 GPH, 90°, Type A
V4.00 90DB	4.00 GPH, 90°, Type B
V4.50 80DA	4.50 GPH, 80°, Type A
V4.50 80DB	4.50 GPH, 80°, Type B
V4.50 90DA	4.50 GPH, 90°, Type A
V4.50 90DB	4.50 GPH, 90°, Type B
V5.00 60DB	5.00 GPH, 60°, Type B
V5.00 80DA	5.00 GPH, 80°, Type A
V5.00 80DB	5.00 GPH, 80°, Type B
V5.00 90DA	5.00 GPH, 90°, Type A
V5.00 90DB	5.00 GPH, 90°, Type B
V5.50 90DA	5.50 GPH, 90°, Type A
V5.50 90DB	5.50 GPH, 90°, Type B
V6.00 60DB	6.00 GPH, 60°, Type B
V6.00 80DA	6.00 GPH, 80°, Type A
V6.00 80DB	6.00 GPH, 80°, Type B
V6.00 90DA	6.00 GPH, 90°, Type A
V6.00 90DB	6.00 GPH, 90°, Type B
V6.50 80DB	6.50 GPH, 80°, Type B

BURNER COMPONENTS

Suntec Fuel Pumps



- ◆ Model A-7000 single-stage fuel units
- ◆ Single-pipe installations to 12" hg. vacuum
- ◆ Two-pipe installations to 12" hg. vacuum
- ◆ Lift or gravity feed applications with 10 PSI maximum inlet/return pressure
- ◆ Suitable for no. 2, no. 1 fuel oil, or kerosene
- ◆ Mounting in any position
- ◆ Pressure adjustment valve



		Each
V00-134952LH	Left Hand - 3 GPH - 3450 RPM - A2VC-7118	122.10
V00-13645	Right Hand - 3 GPH - 2850 RPM - A2VA-7142	129.20
V00-14283	Right Hand - 3 GPH - 3450 RPM - A2VA-7116	120.30
V00-14375	Right Hand - 7 GPH - 3450 RPM - A2YA-7916	168.40

Wayne Fuel Pump



- ◆ Can be used in place of the Suntec fuel pump
- ◆ Suitable for no. 2, no. 1 fuel oil, or kerosene
- ◆ Automatic by-pass to protect against shaft seal leaks due to clogged or closed return lines
- ◆ Twist-off cover for easy access strainer cleaning
- ◆ O-ring provides the best sealing against leakage
- ◆ Mechanical seal is guaranteed to 30 PSI inlet pressure



		Each
V-100714-001	Right Hand - 3 GPH - 3450 RPM - Fuel Pump - #100714-001	100.50
V00-99004	Strainer & O-ring Kit	8.00

Beckett CleanCut Fuel Pumps



- ◆ Simple design provides faster cleaning, more reliable cut-offs and cut-ons
- ◆ Suitable for no. 2 or lighter fuel oils
- ◆ 100-200 PSI - Factory set @ 100 PSI
- ◆ Inlet pressure 10 PSI
- ◆ Includes built-in solenoid w/cord set
- ◆ Higher capacity - 4 GPH @ 100 PSI
- ◆ 3600 RPM max.



		Each
V0B-2184402U	Fuel Pump - 12V - #2184402U	105.70
V0B-2184403U	Fuel Pump - 240V - #2184403U	103.90
V0B-2184405U	Fuel Pump - 120V - #2184405U	102.10

Bacharach Smoke Tester

- ◆ Includes smoke tester, paper, & chart
- ◆ Eliminates the guess work
- ◆ A must for the professional



		Each
Z09-00004	Complete smoke test kit	332.80

Insulation

- ◆ Running foot = 4' x 1'
- ◆ Roll = 100 square feet
- ◆ 1" Thick
- ◆ Ceramic fiber - 6 lb. density



90-00119,
3102-00119

		Each
Z01-00005-F	Insulation - Per Running Foot	13.80
Z01-00005-R	Insulation - Per Roll	344.00
90-00119	Insulation - 1" x 14" Diameter w/4 1/2" Dia Hole	13.10
3102-00119	Insulation - 1" x 18" Diameter w/4 1/2" Dia Hole	21.60

Fuel Nozzle Wrench



- ◆ Easy to use
- ◆ Hold fuel nozzles and adapter at the same time
- ◆ A must for the professional



		Each
Z01-00095	Fuel nozzle wrench	105.00

Fuel Pressure Test Gauge



- ◆ Easy to use
- ◆ Easy to read face
- ◆ No more guess work
- ◆ A must for the true technician

		Each
Y02-00041	Gauge 0 - 200 PSI	16.60
E06-00003-1	1/4" F x 1/8" F Bell Coupling	1.30
E12-00045-2	1/8" M x 1/8" M - 4 1/2" Long - GS Pipe Nipple	6.00
E04-00001-2	1/4" M x 1/8" F - GS Pipe Bushing - Hex Head	0.90

Immersion Heaters

- ◆ Screwplug heaters
- ◆ 10KW
- ◆ 25" Heater
- ◆ 48" Lead



		Each
F07-00024	Immersion Heater - 1 1/4" Male - 330V	216.00
F07-00025	Immersion Heater - 1 1/4" Male - 265V	216.00
F07-00026	Immersion Heater - 1 1/4" Male - 530V	216.00

Motorized Dampers

- ◆ Designed to operate with all 24V, 60HZ intermittent ignition & standing pilot ign. systems
- ◆ Timing: opens or closes in 15 seconds
- ◆ Includes 8' wiring harness for easy installation
- ◆ Safety feature: dual switches
- ◆ Burner can fire only if the damper is in the open position
- ◆ Prevents cold air from being drawn down & freezing a coil
- ◆ Prevents residual heat from being drawn up & outside
- ◆ Superior corrosion protection: stainless steel construction

A closed vent damper prevents residual heat from being drawn up the warm chimney vent by the natural draft. A closed vent damper also will help prevent conditioned air from being pulled through the draft hood and up the chimney by the same stack effect if the appliance is located within the conditioned air space.

When a call for heat is sent from the appliance thermostat, the damper rotates to the open position and the burner circuit is then energized. Electricity is consumed only when there is a need to change damper position, compared with a spring-open, power-close unit, which runs continuously during off-cycle times. This also contributes to the life of the product.



		Each
Z01-00105	10" Damper	345.20
Z01-00104	12" Damper	366.40

Conversion Kits

- ◆ For Robertshaw Gas Valves
- ◆ LP: Non-regulated
- ◆ NG: Regulated

Robertshaw



		Each
S03-00421	LP Conversion Kit	2.80
S03-00425	NG Conversion Kit	11.10

Pilot Couple

- ◆ 4 Port universal type pilot burner
- ◆ 48" Long
- ◆ NG = .020 Orifice
- ◆ LP = .014 Orifice

Note – The 36" Version is no longer available. NEW version is 48" instead.



		Each
S03-00280	Pilot Couple (LP) - #PCA50TL014L48 w/.014 Orif.	179.30
S03-00282	Pilot Couple (NG) - #PCA50TL014L48 w/.020 Orif.	179.30

Gas Valves & Actuators

Robertshaw

- ◆ 1" F x F
- ◆ Max BTU-HR:
LP - 1,150,000 / NG - 720,000
- ◆ Independent automatic pilot valve
- ◆ Built-in filters, inlet & outlet screen self protection
- ◆ Manual gas cock
- ◆ EI = Electronic ignition
- ◆ LP = Liquid propane, non-regulated
- ◆ NG = Natural gas, regulated
- ◆ SP = Standing Pilot

Actuator Colors:

Black – 12/24V
Brown – 120V
Green – 230V



		Each
S03-00408	12VDC/24VAC - SP, NG Gas Valve	292.20
S03-00412	12VDC/24VAC - SP, LP Gas Valve	292.20
S03-00400	12VDC/24VAC - EI, NG Gas Valve	416.30
S03-00400-LP	12VDC/24VAC - EI, LP Gas Valve	416.30
S03-00411	120V - SP, NG Gas Valve	292.20
S03-00414	120V - SP, LP Gas Valve	292.20
S03-00409	208/230V - NG Gas Valve	292.20
S03-00415	208/230V - LP Gas Valve	292.20
S03-00427	12VDC/24VAC NG Actuator	83.30
S03-00423-A	12VDC/24VAC LP Actuator	83.30
S03-00400-01	12VDC/24VAC - EI - NG Actuator	83.30
S03-00422	115V NG Actuator	83.30
S03-00426	115V LP Actuator	83.30
S03-00423	230V NG Actuator	83.30
S03-00423-B	230V LP Actuator	83.30

Electronic Ignition Module

- ◆ Intermittent pilot module
- ◆ 100% Shutoff IP
- ◆ 15 Sec. L.O.
- ◆ 24V, 60HZ
- ◆ NG/LP



Honeywell

S03-00444



S03-00450,
S03-00450A



S03-00445



1100A-00445

		Each
S03-00444	Honeywell #S8610H	135.00
S03-00445	Electronic Ignition Cable - 30"	18.10
S03-00450	Electronic Ignition Ignitor/Sensor "B" mntg. - .018 orf.	45.20
S03-00450A	Electronic Ignition Ignitor/Sensor "B" mntg. - .020 orf.	45.20
S03-00450-01	NG Pilot Orifice	3.50
1100A-00445	Electronic Ignition Cable - 54"	17.00

BURNER COMPONENTS

Gas Burners

Solarflo

- ◆ NG or LP
- ◆ Z-21 = 20 Jets
- ◆ X-11 = 32 Jets
- ◆ X-44 = 44 Jets
- ◆ X-66 = 66 Jets
- ◆ X-88 = 88 Jets
- ◆ X-104 = 104 Jets
- ◆ S03-00124, High altitude
- ◆ All burners carry .640 jets except for S03-00124, which has .638 jets.



		Each
S03-00110	NG Burner - #Z-21 - #50 Orifice	282.50
S03-00111	LP Burner - #Z-21 - #60 Orifice	282.50
S03-00120	NG Burner - #X-11 - #50 Orifice	254.60
S03-00121	LP Burner - #X-11 - #60 Orifice	254.60
S03-00124	LP Burner - #X-11 - #66 Orifice "High Altitude"	254.60
S03-00130	NG Burner - #X-44 - #50 Orifice	239.40
S03-00131	LP Burner - #X-44 - #60 Orifice	239.40
S03-00140	NG Burner - #X-88 - #50 Orifice	1,045.00
S03-00150	NG Burner - #X-104 - #50 Orifice	1,143.80
S03-00151	LP Burner - #X-104 - #60 Orifice	1,143.80
S03-00160	NG Burner - #X-66 - #50 Orifice	763.80
S03-00161	LP Burner - #X-66 - #60 Orifice	763.80

Control Transformers

DONGAN TRANSFORMERS

- ◆ 50/60 HZ
- ◆ (P) = Primary
- ◆ (S) = Secondary
- ◆ Dongan



		Each
F06-00018	120V (P) x 24V (S) - .050 K.V.A.	111.00
F06-00019	208V (P) x 24V (S) - .050 K.V.A.	114.00
F06-00028	208V (P) x 24V (S) - .100 K.V.A.	133.30
F06-00040	208V (P) x 120V (S) - .050 K.V.A.	107.70
F06-00016	240V (P) x 120V (S) - .050 K.V.A.	107.70
F06-00015	240 x 480V (P) x 24V (S) - .050 K.V.A.	107.70
F06-00014	240 x 480V (P) x 24V (S) - .100 K.V.A.	141.00
F06-00021	240 x 480V (P) x 120V (S) - .050 K.V.A.	107.70
F06-00037	240 x 480V (P) x 120V (S) - .100 K.V.A.	137.30

Gas Jets For Burners

- ◆ NG or LP
- ◆ Brass

		Each
S03-00186	NG Jet - .640 - #50 Orifice	6.50
S03-00188	LP Jet - .640 - #60 Orifice	6.50
S03-00190	LP Jet - .638 - #66 Orifice	6.50



Draft Diverters

- ◆ Heavy Duty 20 Gauge carbon steel construction
- ◆ Painted black
- ◆ Separate venting air from combustion

		Each
Z01-00099	Draft Diverter 8"	101.20
Z01-00099-S	Draft Diverter 8" in, 6" out	101.20
Z01-00100	Draft Diverter 10"	117.90
Z01-00103	Draft Diverter 11"	218.90
Z01-00101	Draft Diverter 12"	190.60
Z01-00107	Draft Diverter 12" in, 6" out	214.30
Z01-00101-S	Draft Diverter 12" in, 10" out	190.60
Z01-00102	Draft Diverter 16"	327.50
Z01-00102-S	Draft Diverter 16" in, 14" out	327.50



BURNER COMPONENTS

Beckett Replacement Parts

◆ Burner parts for Beckett burners

Quality



		Each
V0B-51843U	Strainer Kit - #51843U	8.50
V0B-21807U	Valve Cordset - #21807U	8.40
V0B-21877U	Valve Stem - #21877U	9.60
V0B-21754U	Valve Coil - 12/24V - #21754U	20.30
V0B-21755U	Valve Coil - 120V - #21755U	13.90
V0B-21756U	Valve Coil - 240V - #21756U	20.30
V0B-21887U	PD Timer - 120V - #21877U	13.40

Beckett Burner Motors

Quality



Image 1

ADC Motor - #21699UF
*Includes adapter for 1/2" shaft

PSC Motor - #21805U

SDC Motor - #21539UF

		Each
V0B-21805U	Burner Motor - #21805U - 1/7 HP, 3450 RPM, 120V, 1PH/60HZ, Nema M Mounting Flange (For Beckett AFG, Wayne MSR) - PSC Photo	103.40
V0B-21174U	Burner Motor - #21174U - 1/7 HP, 3450 RPM, 240V, 1PH/60HZ, Nema M Mounting Flange (For Beckett AFG) - Image 1 Photo	134.90
V0B-21699U	Burner Motor - #21699UF - 1/6 HP, 3450 RPM, 12VDC, Nema M Mounting Flange (For Beckett ADC, Wayne MSR-DC) - ADC Photo	129.20
V03-21344U	Burner Motor - #21344U - 1/4 HP, 3450 RPM, Dual Voltage - 120/240V, 1PH/60HZ, Nema 48N Mounting Flange (For Beckett SM, SF and Wayne E, EH) - Photo not available.	166.50
V0B-2364U	Burner Motor - #2364U - 1/4 HP, 3450 RPM, 120V, 1PH/60HZ, Nema N Mounting Flange (For Beckett SM, SF and Wayne E, EH) - Image 1 Photo	142.30
V00-21173U	Burner Motor - #21173U - 1/4 HP, 3450 RPM, 240V, 1PH/60HZ, Nema N Mounting Flange (For Beckett SM, SF and Wayne E, EH) Image 1 Photo	131.50
V03-2900U	Burner Motor - #2900U - 1/5 HP, 3450 RPM, 120V, 1PH/60HZ, Nema N Mounting Flange (For Beckett SM) - Image 1 Photo	123.20
V0B-21539UF	Burner Motor - #21539UF - 1/4 HP, 3600 RPM, 12VDC, Nema N Mounting Flange (For Beckett SDC) - SDC Photo	226.50

Beckett Burner Igniters

◆ Ignitor: 20,000 Volt peak
◆ Approx. 1.1 lbs.

Quality



51771U

51824U

51825U

51827U

51836U

51776U,
51777U,
51868U

51778U,
51779U

51838U

7435U

		Each
V0B-7435U	Igniter Only - 12V #7435U	161.70
V0B-51777U	Igniter Ass'y - 12V #51777U (Beckett ADC w/o Ignition Control Board)	173.20
V03-51776U	Igniter Ass'y - 12V #51776U (Beckett ADC w/Ignition Control Board)	206.10
V00-51779	Igniter Ass'y - 12V #51779U (Beckett SDC w/o Ignition Control Board)	173.70
V0B-51778U	Igniter Ass'y - 12V #51778U (Beckett SDC w/Ignition Control Board)	206.60
V0B-51868U	Igniter Ass'y - 12V #51868U (Beckett MSR-DC w/o Ignition Control Board)	179.60
V0B-51838U	Igniter Only - 120V/1PH/60HZ #51838U	67.60
V0B-51771U	Igniter Ass'y - 120V/1PH/60HZ #51771U (Beckett AFG)	73.00
V0B-51824U	Igniter Ass'y - 120V/1PH/60HZ #51824U (Beckett SM/SF)	73.00
V0B-51827U	Igniter Ass'y - 120V/1PH/60HZ #51827U (Wayne E)	73.00
V0B-51825U	Igniter Ass'y - 120V/1PH/60HZ #51825U (Wayne MSR)	73.00
V0B-51836U	Igniter Ass'y - 120V/1PH/60HZ #51836U (Wayne Blue Angel)	73.00
V0B-51842U	Terminal Kit #51842U (For All Beckett Igniters)	11.60

Beckett Burner Transformers

◆ Transformer: 10,000 Volt spark
◆ Approx. 8 lbs.



Quality

		Each
V0B-5929U	240V/60HZ Transformer for AFG Burners	97.60
V0B-21176U	240V/60HZ Transformer for S Burners	97.60